

# DS-K4H258SN说明书

**HIKVISION**

## 产品图片



## 技术参数

磁体尺寸：长228\*宽38\*高28.5mm

输入电压：DC12V

吸板尺寸：长182\*宽38\*高13mm

工作电流：420mA

最大拉力：260KG

产品重量：2KG

适用门型：木门、金属门、防火门


## 安装步骤及示意图

### 锁体安装步骤一

- A. 在门扇上开出一道槽，可使锁体两侧陷入门扇内
- B. 将磁体排线与电源线连接
- C. 将磁体装入门扇槽内，螺丝固定

### 吸板安装步骤二

- A. 在门与锁体吸力工作位置上粘上吸板贴纸
- B. 按照吸板贴纸，在门上钻出相应孔
- C. 按图所示，将吸板安装在门上

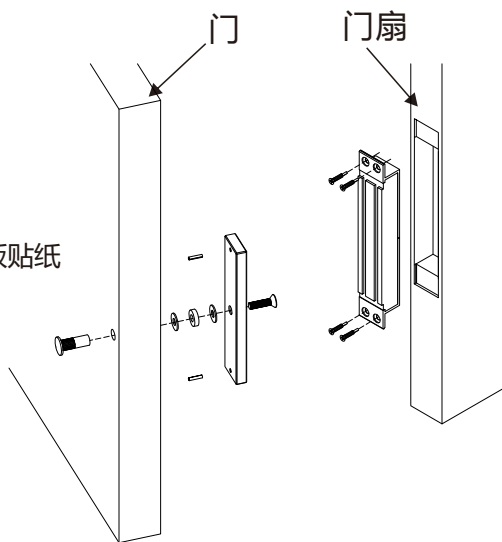

# DS-K4H258SN Specification

**HIKVISION**

## Product Image



## Specification

Lock Size: 228\*38\*28.5mm (L\*W\*H)

Input Voltage: DC12V

Armature Plate: 182\*38\*13mm (L\*W\*H)

Current: 420mA

Holding Force: 260KG

Weight: 2KG

Suitable: Wooden door, Metal door, Fireproof door

## Installation Illustration

Lock body installation step one:

1. Make a slot in the door leaf, make both sides of the lock body sink into the door leaf.
2. Connect the magnet cable with the power cable.
3. Install the magnet into the door slot and fix it with screws.

Armature plate installation step two:

1. Stick on the armature plate sticker on the suction working position of the door and lock body.
2. Drill corresponding holes on the door according to the sticker of armature plate.
3. Install the armature plate on the door as shown in the figure.

