

DS-K4H258S Specifications

HIKVISION

Product Image



Specification

Lock Size: 238L*25W*45H(mm)

Armature Plate Dimension: 182L*38W*12.5H(mm)

Holding Force: 280kg(550Lbs)

Input Voltage: 12VDC


Current: 340mA

Weight: 2.1KG

Suitable: Wooden door,


Glass door, Metal door,

Fireproof door

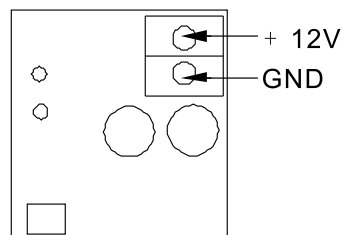


Circuit Board Diagram

Installation

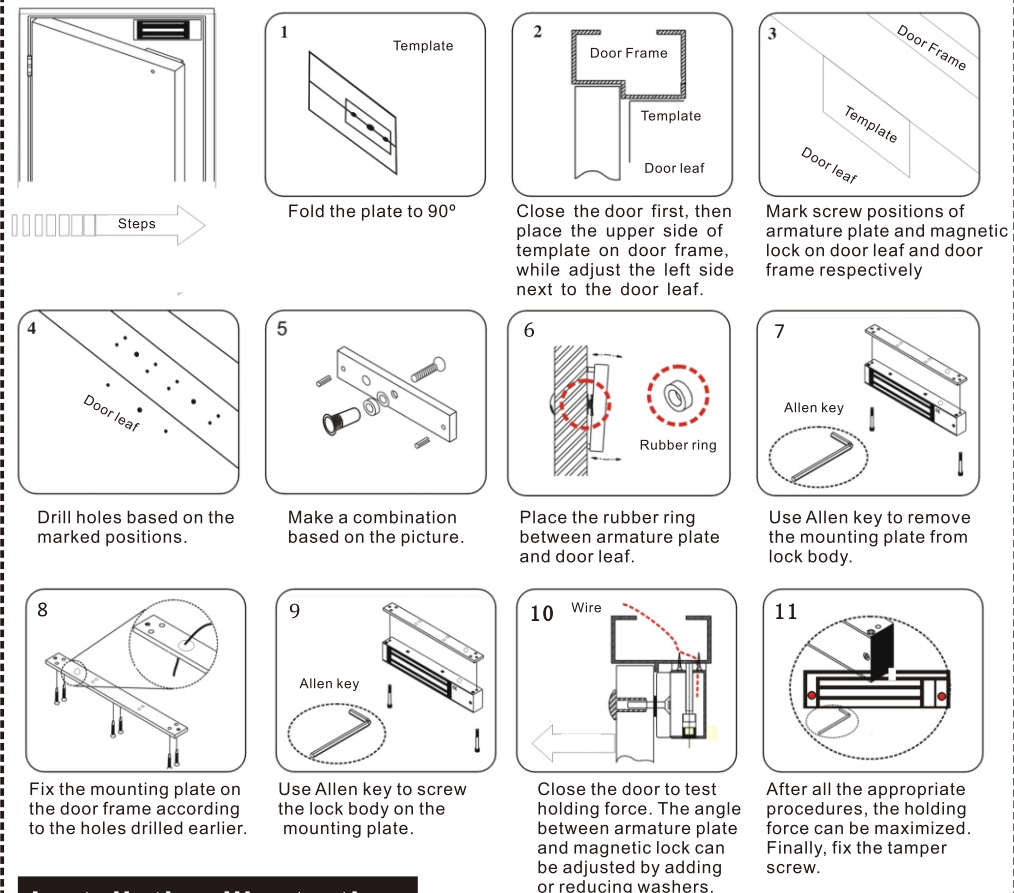

Installation Illustration

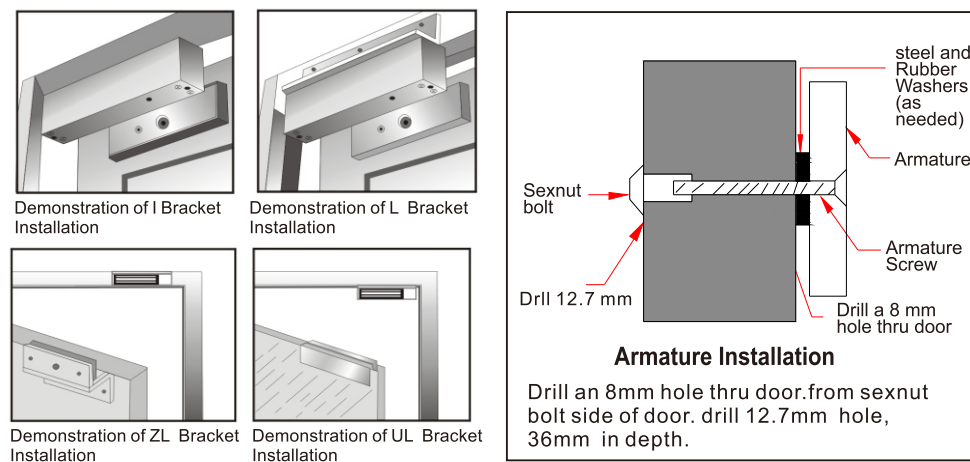

产品图片



技术参数

锁体尺寸: 238L*25W*45H(mm)

吸板尺寸: 182L*38W*12.5H(mm)

最大拉力: 280kg(550Lbs)


输入电压: 12VDC

工作电流: 340mA


产品重量: 2.1KG

适用门型: 木门、玻璃门、金属门、防火门


线路板示意图




安装步骤




安装步骤




贴在门扇上




关上门后, 安装开孔纸置于靠近门框顶端以及门轴另一端位置。




确定安装开孔纸位置后, 依照开孔纸上标示吸板与磁力锁的孔位。




依照标记位置钻孔




依照图示组合吸板 (不同的门板所钻的孔孔径有所不同, 请参照附图)




橡胶垫片的作用在于使吸板能微微调动, 让吸板和磁力锁吸附面能紧密贴合面无间隙, 吸力达到最高。




先将锁体吊装条拆除




按已钻好的孔位旋紧螺丝固定吊装条



用六角板手把内六角螺丝固定磁力锁体于吊装条上。



关门并测试吸力, 可增减垫片或转紧吸板来调整吸板和磁力锁吸附面的间隙




当确定所有安装步骤都正确无误, 吸力达到正常, 则最后步骤把防拆螺丝旋紧。


安装示意图



吸板安装槽架效果




L型支架效果




ZL型支架效果




UI型支架效果



单开门



双开门

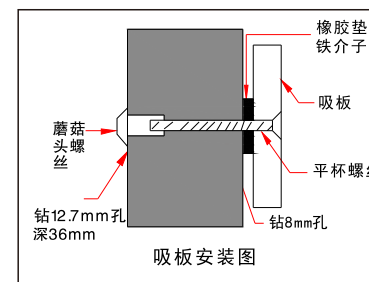

吸板安装图